

2024

VALID TO 31 Dec

Australasian Certification Authority for
Reinforcing and Structural Steels Ltd



PRODUCT CERTIFICATION
www.steelcertification.com

CERTIFICATE OF APPROVAL

Technical Approval

This is to certify that

VSL Australia Pty Ltd

at

113-115 Abbott Rd

Hallam Vic Australia 3803

has satisfied the Authority that it complies with the rules of the ACRS Product Certification Scheme for Technical Approvals and is entitled to use the ACRS mark in relation to the products listed on this certificate.



SCOPE OF CERTIFICATION

Product: Continuously Threaded Bar 48mm 1030 MPa

Scheme: ACRS Scheme Rules

Normative document: AS/NZS 4672.1:2007

Note: Meets all requirements of AS/NZS 4672 with the exception of nominal diameter of 48mm which is not included in Table 6.1 and has been tested and manufactured as per the requirements of AS/NZS 4672.1:2007.

This certificate remains the property of the Authority and is issued subject to the Regulations of the Authority.

CERTIFICATE NUMBER	VERSION	FIRST APPROVAL	ISSUE DATE	EXPIRY DATE
T1017	1	29 October 2020	01 January 2024	31 December 2024

SIGNED FOR ACRS

Andrew Wheeler,

Executive Director

AUSTRALASIAN CERTIFICATION AUTHORITY FOR REINFORCING AND STRUCTURAL
STEELS LTD | ABN: 40 096 692 545 | PO BOX 1369, CROWS NEST NSW 1585, AUSTRALIA

To check the validity of this certificate please scan the above Static QR Code with the ACRS
Cloud App or visit www.steelcertification.com

Cert. Ref.: 129-01 T1017 1

This document is uncontrolled when printed View original at www.steelcertification.com

JAS-ANZ




www.jas-anz.org/register
Accreditation certificate
number Z5221212AC

2024

VALID TO 31 Dec

Australasian Certification Authority for
Reinforcing and Structural Steels Ltd



PRODUCT CERTIFICATION
www.steelcertification.com

CERTIFICATE OF APPROVAL

Technical Approval

Certificate Number: T1017
VSL Australia Pty Ltd

at
113-115 Abbott Rd
Hallam Vic Australia 3803



Products assessed by ACRS to the following Standards:

AS/NZS 4672.1:2007 Prestressing Bar


Other Continuously Threaded Bars: Diameter 48 mm, 0.1% Proof stress 1030 MPa, Relax 2

Notes: 48 mm nominal diameter is not included in Table 6.1 and has been tested and manufactured as per the requirements of AS/NZS 4672.1:2007


Heat treatment of Stress Bar is undertaken by Milltech, 5 Laverick Avenue Tomago NSW

Approved Company Information

Marking

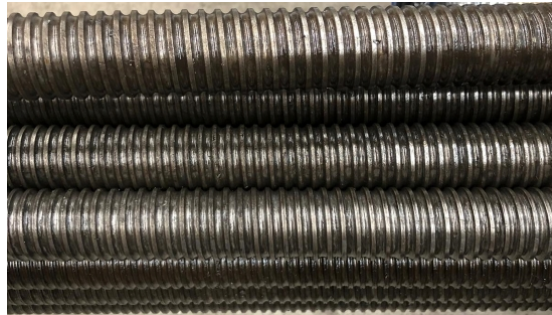

Tag

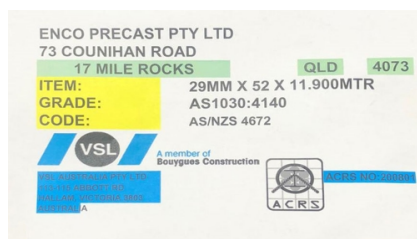

To check the validity of this certificate please scan the above Static QR Code with the ACRS Cloud App or visit www.steelcertification.com

Cert. Ref.: 129-01 T1017 1

This document is uncontrolled when printed View original at www.steelcertification.com

JAS-ANZ



www.jas-anz.org/register
Accreditation certificate
number Z5221212AC